


VIRTUAL SMART STRUCTURES AND DYNAMICS LAB

EXPERIMENT 6

MODES OF VIBRATION OF SIMPLY SUPPORTED PLATE

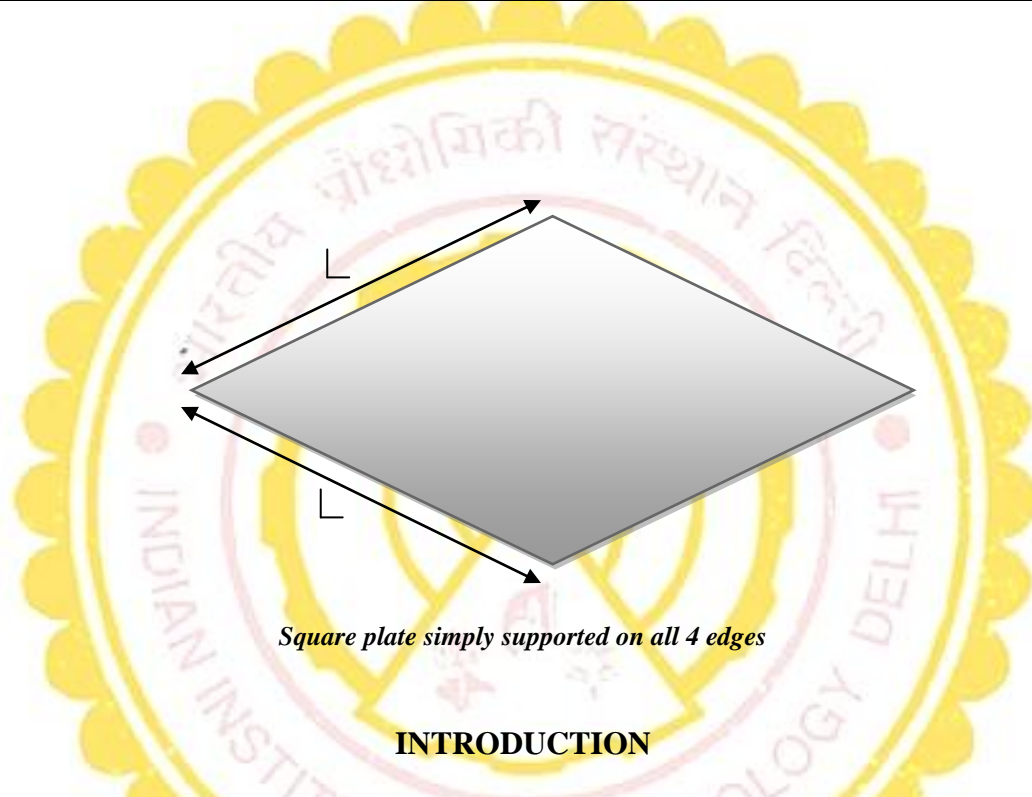

Square plate simply supported on all 4 edges

INTRODUCTION

This simulation experiment aims to study the modes of vibrations of a square plate simply supported on all edges. The simply supported plate is different from lumped masses (discrete system). In the discrete systems, stiffness, mass, and damping are modeled as discrete properties. The mathematical models for discrete systems are ordinary differential equations, which thereby render themselves quite conducive to numerical solution techniques. The alternative continuous method of modeling a physical system, which is considered here, is based on the principle of distributed mass and stiffness characteristics. Such a system for which stiffness and mass are considered to be distributed properties (rather than discrete) is referred to as a distributed system.

Unlike a discrete system that possesses a finite number of degrees of freedom (DOF), the distributed systems, which are considered to be composed of an infinite number of infinitesimal mass particles, theoretically possess an infinite number of degrees of freedom (DOF). In the case of a plate, it is divided into strips along the X and the Y directions. However, only the first few modes are much significant. It is thus not necessary to compute all of them.

This computer model is based on a distributed system. By using this online Java program, the user can easily get the natural frequencies of the plate as well as the corresponding mode shapes.

In addition, there is an exercise for user at the end of programme. The user need to plot the graph between frequencies and length of plate keeping all others factors constant.

THEORY

For simply supported plate, the frequencies f_n and the mode shapes $\phi(x,y)$ are given by (Mukhopadhyay, 2006)

$$f_n = \frac{\pi(m^2 + n^2)}{2L^2} \sqrt{\frac{D}{\rho t}} \quad (1)$$


$$\phi(x, y) = \sin\left(\frac{n\pi x}{L}\right) \sin\left(\frac{m\pi y}{L}\right) \quad (2)$$

where the parameter D is given by

$$D = \frac{Et^3}{12(1 - \nu^2)} \quad (3)$$

n and m are number of troughs/ crests in x and y directions respectively. Further,
 L is length of plate
 E is Young's modulus of elasticity
 ρ is density

User can get different modes of vibration of simply supported plate from this program, just in single click.

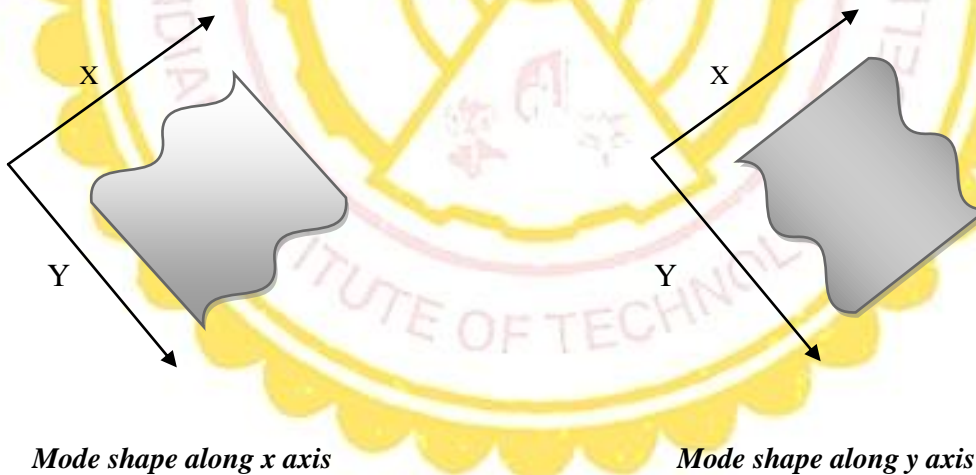

REFERENCES

Chopra, A. (2001), Dynamics of Structures, Prentice Hall of India limited, New Delhi.
 Mukhopadhyay, M. (2006), Structural Dynamics Vibrations and Systems, Ane Books India, New Delhi.
 Paz, M. (2004), Structural Dynamics: Theory and Computations, 2nd ed., CBS Publishers and Distributors, New Delhi.